



TYPE _____

CATALOG# _____




SURFACE MOUNT

canopy not shown



RECESSED MOUNT

DIMENSIONS

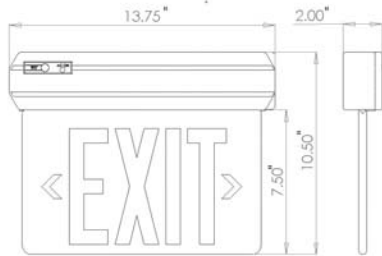

AEL EDGELIT LED EXIT SIGN

DESCRIPTION

The Commercial Series Thermoplastic Edge-lit exit offers a new gradual radius sleek profiled design unlike any other available in the industry featuring contoured 2 panel injection molded acrylic faces with universal chevrons to adapt to any field installation. Red or green lettering is available on mirrored backgrounds with recessed or surface mounting. Product ships complete with universal canopy (not shown).

HOUSING

Recessed version features heavy gauge Galvanized steel back box with integral mounting channels for ease of installation in any ceiling type with a die formed steel trim plate available in white or black. The surface mount design features a uniquely contoured thermoplastic upper body in black, with universal mounting capability.

ELECTRONICS

AC only and emergency operation option (provides 90 minutes of illumination upon loss of power) available. Emergency operation units provided with solid state design with low voltage disconnect, AC lock-out, brown out protection, and AC indicator test switch. Battery is sealed maintenance free Nickel Cadmium with an estimated service life of 12 years. Circuitry is constant current design and recharge time is less than the required UL 924 standard. All units are standard dual voltage 120/277 and draw less than 2.5 watts.

ILLUMINATION

Long lasting high output ALInGaP LED's with the highest performance and least degradation available in the market with a rated life of 10 years plus.

CODE COMPLIANCE

Tested and Listed to UL 924 for damp location, meets or exceeds NFPA, NEC, and OSHA illumination standard.

WARRANTY

5 years on housing and electronics with a 5 year pro rated warranty on battery.

COMMERCIAL SERIES

FOR RECESSED APPLICATION

Suggested Opening = 4.75" x 15"

Trim Plate Measurement = 5.5" x 16"

AEL						
Model	Mounting	No. of Faces	Letter/Panel Color	Housing Color	Battery Backup	Factory Installed Options
U RSC	Universal Mount Ceiling Recessed Option	1 Single 2 Double	R/M Red on Mirror G/M Green on Mirror R/C * Red on Clear G/C * Green on Clear * single face only	B Black W White BA Brush Alum. (RSC Only)	Blank=AC Only EM= 90 Minutes of emergency Power	DI Dual Input AL Arrow Left AR Arrow Right AD Arrow left & Right FBR Front Left ; Back Right FBD Front & Back; left & Right UNV Universal Field Installed SPX Custom Modifications (Specify)

