




TYPE _____


CATALOG# _____

AL-1300 Fluorescent Emergency Ballast

SPECIALLY PRODUCTS

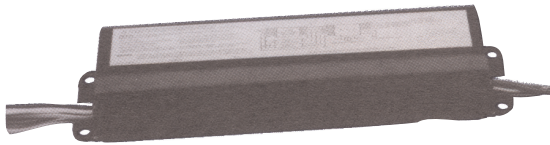

DIMENSIONS

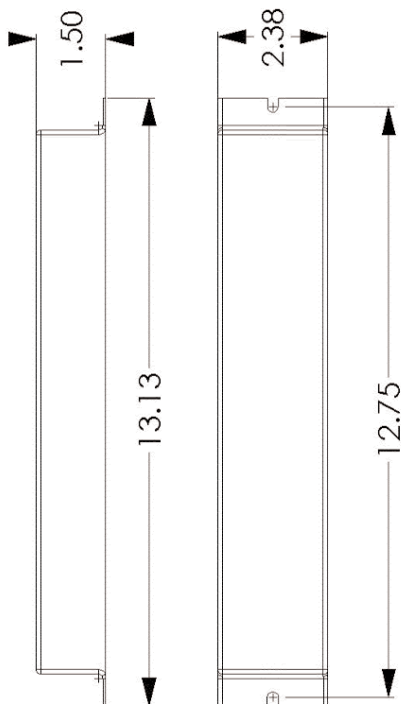

GENERAL DESCRIPTION

The AL1300 emergency ballast allows the same fixture to operate in both emergency and normal operation. Automatic switching to emergency mode occurs in the event of a power failure, operating one or two of the existing lamps for a period of 90 minutes up to 1300 lumens. The battery, charger and inverter circuit are integral to this compact single housing ballast. Designed for wire way mounting or direct mount to top of fixture. Unit weighs approx. 4 lbs.

ILLUMINATION

Will operate most 2' -8' single, bi-pin T8, T12, HO or VHO fluorescent lamps with an initial illumination of 1300 lumens. (1 or 2 lamps)

ELECTRONICS

Dual Voltage 120/277 VAC @ 60Hz designed for cold start operation on all specified lamps. Input is 3.5 Watts. Automatic switching to emergency mode via integral battery, charger, and inverter circuitry which includes separate one piece indicator light and test switch.

DIMENSIONS

Length	13 1/8"
Width	2 3/8"
Height	1 1/2"
Mounting Center	12 3/4"

CODE COMPLIANCE

UL listed
Meets or exceeds all NEC and Life Safety Code emergency lighting requirements.

WARRANTY

5-year replacement.

AL-1300

Model Name

Model	AL 1300
Lumens	1300
Linear Lamps	
2'-8' Rapid, Instant energy saving T8-T12	1
2'-8' Rapid, Instant energy saving T8-T12, HO, VHO	2
2'-8' Rapid, Instant energy saving T8-T12	1
20W-40W Circline	1
20W-40W Circline	2
40W Biax	1
50W Biax	1
55W Biax	1



SP 007A