



TYPE _____


CATALOG# _____



LG-U

NOBLER SERIES
Universal Exit Sign

DIMENSIONS

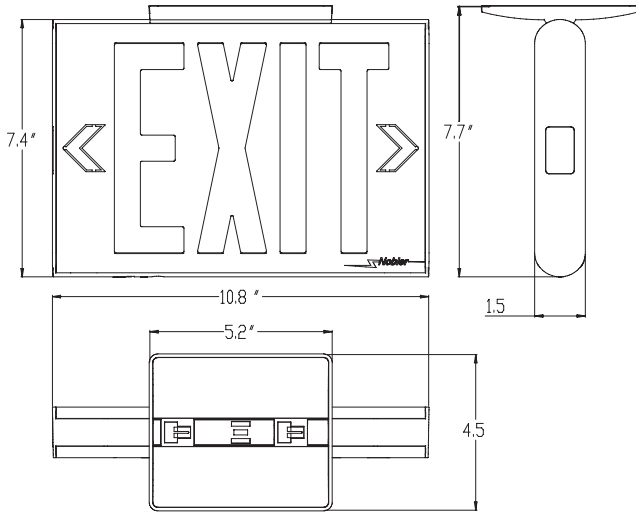

GENERAL DESCRIPTION

The Nobler Series™ thermoplastic LED exit sign provides a sleek; low-profile compact design, packaging the highest level of quality and even illumination with the easiest and quickest installation available in the market today.

HOUSING & FACE DESIGN

The housing is UV stable injection-molded thermoplastic listed to UL 95-VA standard. Stencils are made of the same material with field selectable universal snap in and out chevrons. Available in a choice of White, Black and Titanium. All with standard universal mounting.

ILLUMINATION

Illuminated by Long lasting high output ALInGaP LEDs with minimum degradation over life of LEDs. Unit draws less than 1 watts and meets all Energy Star Requirements. Available in red or green.

ELECTRONICS

Standard Heavy duty Transformer. Input is dual voltage 120/277 60Hz.. EM option features solid state design with AC indicator LED and test switch. Battery is standard Nickel Cadmium.


CODE COMPLIANCE

Meets or exceeds UL 924, NFPA, NEC, and OSHA illumination standards.

WARRANTY

5 year pro rated warranty on Sealed Led Acid battery.
7 year pro rated warranty on Nicad battery

NOBLER SERIES™

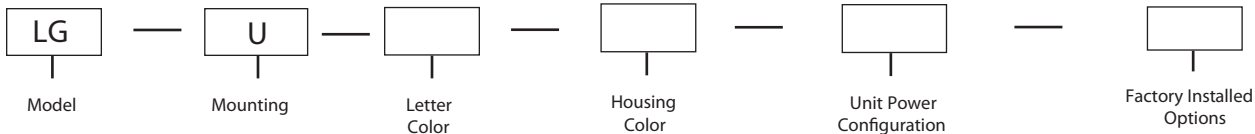

U Universal

R Red
G Green

W White
B Black
Ti Titanium

AC AC Only
EM Emergency

SD Self Diagnostics
220 200vac Input 50/60 HZ



20 Pocono Rd. Brookfield, CT. 06804 Tel: 203-775-0172 ~ Fax: 203-775-0797