



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

SPECIFICATIONS

FEATURES

- Remote-capable thermoplastic exit sign
- Designed for ceiling or wall mounting
- Fast, easy installation
- Remote capable: choice of 16W or 32W unit capacity
- Part of Astralite's quick ship program

CONSTRUCTION

- UV-stable, impact-resistant thermoplastic housing; meets UL94V-0 flame rating
- Features snap-in installation
- Knockout directional indicators

LAMP

- AllnGaP LEDs with a rated life of 10+ years

ELECTRONICS

- Dual-voltage input capability: 120/277V
- Low-voltage disconnect
- AC indicator light with test switch
- Brownout protection

BATTERY

- Nickel-cadmium battery comes standard
- Provides a minimum of 90 minutes of illumination in emergency mode

COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards

WARRANTY


- 5-year warranty on housing and electronics. Battery is prorated

EEU-2-NH

REMOTE CAPABLE EXIT



DIMENSIONS

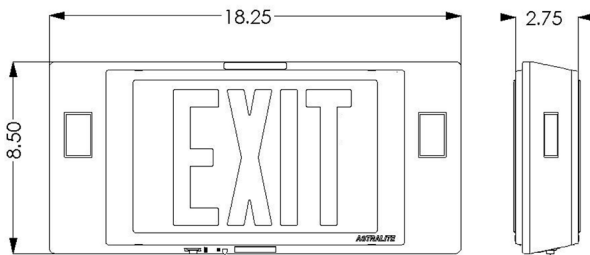

Material	Mounting	Battery	Code Compliance	Dimensions
Thermoplastic	Ceiling / Wall	Nickel-cadmium	UL 924	18.25" W X 8.5" H X 2.75" D

ORDERING GUIDE

MODEL	REMOTE DC WATTAGE	LETTER COLOR	HOUSING COLOR	OPTIONS
EEU-2-NH Remote Capable Exit Sign	16 ¹ 12 Watt Remote 32 ¹ 32 Watt Remote NR No Remote Capability	R Red G Green	W White B Black	220 220 VAC Input SD Self Diagnostics

Notes:

1. 6 VDC only