



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

SPECIFICATIONS

FEATURES

- Contractor's choice EXIT-EM combo
- Available with remote capability (see EEU-2-16-LED)
- Designed for ceiling or wall mounting
- Fast, easy installation
- Part of Astralite's quick ship program

CONSTRUCTION

- UV-stable, impact-resistant thermoplastic housing; meets UL94V-0 flame rating
- Features quick and easy installation with snap in design
- Replaceable chevron directional indicators offer a choice of direction on both stencils
- EXIT letters are 6" tall with 3/4" stroke; 100 ft viewing distance

LAMP

- Utilizes two high-efficiency 1W LED heads in emergency mode; higher wattage lamps are available upon request, consult factory for more options
- Long-lasting high-output AlInGaP LEDs with a rated life of 10+ years illuminate the exit face

ELECTRONICS

- Dual-voltage input capability: 120/277V
- Low-voltage disconnect
- AC lockout installation
- Brownout protection
- AC indicator LED light with push to test button

BATTERY

- Nickel-cadmium battery comes standard
- Provides a minimum of 90 minutes of illumination in emergency mode
- Operating temperature range: 10-40° C

COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards

WARRANTY


- 5 year warranty on housing and electronics. Battery is prorated

EEU-2-LED

LED EXIT/EMERGENCY LIGHT COMBINATION UNIT



DIMENSIONS

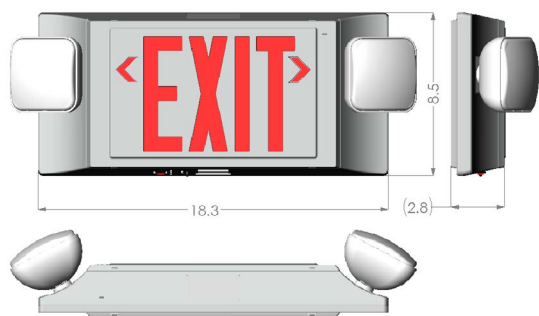

ORDERING GUIDE

MODEL	LETTER COLOR	HOUSING COLOR	OPTIONS
EEU-2-LED LED Exit/Emergency Light Combination Unit	G Green R Red	B Black W White	220 220 VAC Input SD Self Diagnostics SW Special Wording USA Assembled in the US with components of various countries of origin.