



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

## SPECIFICATIONS

### FEATURES

- Energy efficient combination unit with an integrated light bar
- Choice of red or green letters
- Designed for ceiling, wall, or end mounting
- Fast, easy installation
- Part of Astralite's quick ship program

### CONSTRUCTION

- UV-stable, impact-resistant thermoplastic housing; meets UL94V-0 flame rating
- Ships with extra face panel for field conversion to double face
- EXIT letters are 6" tall with 3/4" stroke; 100 ft viewing distance

### LAMP

- High quality LEDs provide uniform diffused illumination
- Draws 4W

### ELECTRONICS

- Dual-voltage input capability: 120/277V
- Brownout protection
- Low-voltage disconnect
- AC indicator light with test switch

### BATTERY

- Nickel-cadmium battery is standard
- Provides a minimum of 90 minutes of illumination in emergency mode
- Operating temperature range: 10-40°C

### COMPLIANCE

- Meets or exceeds UL 924, NFPA, NEC, and OSHA illumination standard

### WARRANTY


- 5-year warranty on housing and electronics. Battery is prorated

## EEU-5-LED

THERMOPLASTIC LED COMBINATION UNIT



## DIMENSIONS

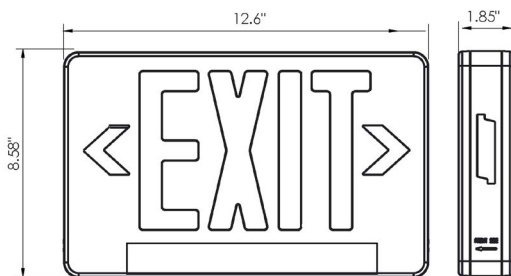

Material	Mounting	Battery	Code Compliance	Dimensions
Thermoplastic	Wall/Ceiling/End	Nickel-Cadmium	UL 924	12.6" W X 8.58" H X 1.85" D

## ORDERING GUIDE

MODEL	LETTER COLOR	HOUSING COLOR
EEU-5-LED Thermoplastic LED Combination Unit	R Red G Green	W White Housing