



TP-SALIDA

THERMOPLASTIC SIGN

COMMERCIAL SERIES



GENERAL DESCRIPTION

THIS LOW-PROFILE THERMOPLASTIC SIGN IS DESIGNED TO PROVIDE EVEN ILLUMINATION WITH EASY INSTALLATION.

HOUSING & DESIGN


THE HOUSING IS UV-STABLE INJECTION-MOLDED THERMOPLASTIC LISTED TO UL STANDARDS. STENCILS ARE MADE FROM THE SAME MATERIAL WITH FIELD-SELECTABLE UNIVERSAL SNAP-IN AND -OUT CHEVRONS.

ILLUMINATION

LONG-LASTING HIGH-OUTPUT LEDs WITH MINIMUM DEGRADATION OVER THE LIFE OF THE LEDs. UNIT DRAWS LESS THAN 3 WATTS.

ELECTRONICS

DUAL-INPUT TRANSFORMER (120/277 60HZ) IS STANDARD. UNIT IS DAMP LOCATION LISTED WITH AN OPTIMAL OPERATING TEMPERATURE RANGE OF 50-104 DEGREES FAHRENHEIT. BATTERY IS STANDARD NICKEL CADMIUM.

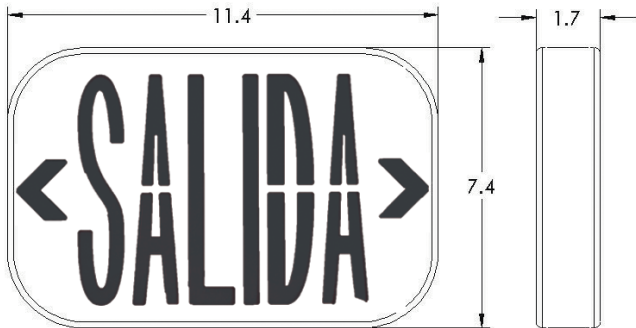

WARRANTY

5-YEAR ON HOUSING AND A 3-YEAR PRO-RATED WARRANTY ON THE BATTERY.

ORDERING GUIDE

TP — SALIDA — R — W — EM