



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

SPECIFICATIONS

FEATURES

- Remote capable recessed emergency light
- Designed for recessed ceiling mounting
- Low-profile design, ideal for most indoor applications

CONSTRUCTION

- Rugged galvanized steel construction with decorative trim bezel in a matte white finish
- Optional mounting bars (CAD-24) facilitate installation in suspended ceilings

LAMP

- Utilizes three 10W MR-16 halogen lamps with fully-adjustable telescoping lamp heads; LED lamping offered as an option, consult factory for more information

ELECTRONICS

- Dual voltage input capability: 120/277V
- Low-voltage disconnect
- AC indicator light with test switch
- Brownout protection

BATTERY

- Lead-acid battery is standard, and provides a minimum of 90 minutes of illumination in emergency mode
- Nickel-cadmium battery offered as an option
- Operating temperature range: 10-40° C

COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards

WARRANTY


- 5-year warranty on housing and electronics. Battery is prorated

ASQ-R-MR16

REMOTE CAPABLE RECESSED EMERGENCY LIGHT



DIMENSIONS

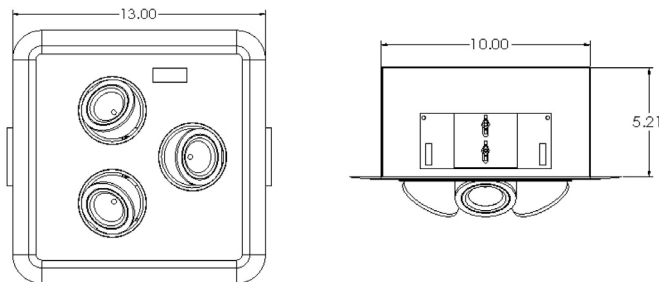

Material	Mounting	Code Compliance	Dimensions
Steel	Ceiling	UL 924	13" W X 13" H X 5.21" D

ORDERING GUIDE

MODEL	TOTAL DC UNIT WATTAGE	DC VOLTAGE	INTEGRAL LAMPS	OPTIONS
ASQ-R-MR16	30	6	10	220
	50 ¹	12 ¹	20 1W LED 3W LED	SD VM ² AM ² TD ³ CAD-24 NC
	30W 50W	6 Volts 12 Volts	3x10W MR-16 3x20W MR-16 3x1W LED 3x3W LED	220 VAC Input Self Diagnostics Voltmeter Ammeter Time Delay Caddy Bar Nickel-cadmium battery

Notes:

1. 60 Watts available at 12 Volts DC.
2. Select one option.
3. Must specify AC input voltage and delay time.