



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

## SPECIFICATIONS

### FEATURES

- Contractor's choice thermoplastic emergency light with adjustable L.E.D. heads
- Part of Astralite's quick ship program

### CONSTRUCTION

- UV-stable, impact-resistant thermoplastic housing; meets UL94V-0 flame rating
- Features a mounting plate for easy installation

### LAMP

- Utilizes (2) high-efficiency 1W adjustable LED emergency heads

### ELECTRONICS

- Dual -voltage input capability: 120/277V
- Low-voltage disconnect
- AC indicator light with test switch
- Brownout protection

### BATTERY

- Nickel-cadmium battery is standard and provides a minimum of 90 minutes of illumination in emergency mode
- Operating temperature range: 10° C - 40° C

### COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards

### WARRANTY


- 5-year warranty on housing and electronics. Battery is prorated.

## LG-100-LED

CONTRACTOR'S CHOICE THERMOPLASTIC EMERGENCY LIGHT



## DIMENSIONS

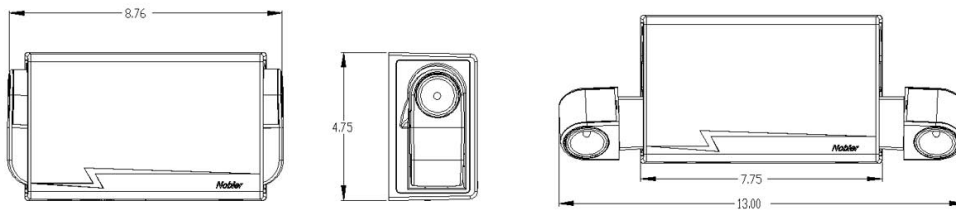

## ORDERING GUIDE

MODEL	HOUSING FINISH	OPTIONS
LG-100-LED	<b>BK</b> Black <b>WH</b> White <b>TI</b> Titanium <b>SP</b> Special Finish	<b>220</b> 220 VAC Input <b>SD</b> Self Diagnostics