



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

SPECIFICATIONS

FEATURES

- Contractor's choice thermoplastic exit sign
- Universal mounting; ships with canopy kit and extra face panel for field-conversion to double face
- Fast, easy installation
- Optional special wording face panels
- Part of Astralite's quick ship program

CONSTRUCTION

- UV-stable, impact-resistant thermoplastic housing; meets UL94V-0 flame rating
- Knockout directional indicators
- EXIT letters are 6" tall with 3/4" stroke; 100 ft viewing distance

LAMP

- AllnGaP LEDs with a rated life of 10+ years

ELECTRONICS

- Dual-voltage input capability: 120/277V
- Low-voltage disconnect
- AC indicator light with test switch
- Brownout protection

BATTERY

- EM option comes standard with nickel-cadmium battery, and provides a minimum of 90 minutes of illumination upon loss of power
- Operating temperature range: 10-40° C

COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards

WARRANTY


- 5-year warranty on housing and electronics. Battery is prorated

TP-U

CONTRACTOR'S CHOICE THERMOPLASTIC EXIT



DIMENSIONS

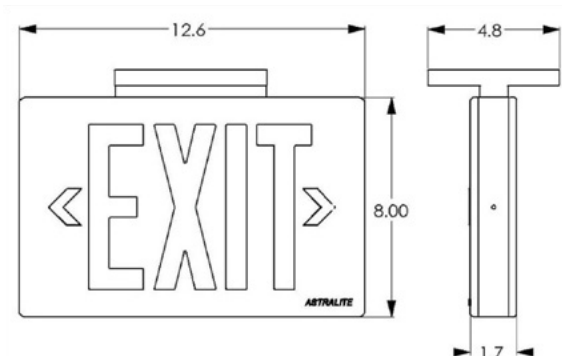

Material	Mounting	Battery	Code Compliance	Dimensions
Thermoplastic	Wall / Ceiling / End	Nickel-cadmium	UL 924	12.6" W X 8" H X 4.8" D

ORDERING GUIDE

MODEL	MOUNTING	LETTER COLOR	HOUSING COLOR	POWER CONFIGURATION	OPTIONS
TP Thermoplastic Exit Sign	U Universal	R Red G Green	GL Gold Metalized W White B Black SL Silver Metalized R Red G Green BLU Blue Y Yellow	AC AC Only EM Battery Backup DI Two Transformer Input DC ¹ Remote DC Input	FL ² Flasher Only FA ³ Fire Alarm Interface FLA ⁴ FL With Audible Alarm FAA ⁵ FA With Audible Alarm SW Special Wording SD Self Diagnostics PK ⁶ Pendant Kit USA Assembled in the US With Components of Various Countries of Origin

Notes:

- 6 to 24 VDC. Must specify input voltage.
- Flashes only when unit goes into emergency condition. Battery units only.
- Flashes in both modes when signal is received (6 to 24 VDC).
- FL option with Audible Alarm. Battery units only.
- FA option with Audible Alarm.
- Order separately; refer to the pendant kit (PK) specification sheet for more information