



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

## SPECIFICATIONS

### FEATURES

- Remote capable thermoplastic exit sign
- Designed for wall, ceiling, or end mounting
- Remote capability: 14W at 6V
- Snap-in design for fast, easy installation
- Part of Astralite's quick ship program

### CONSTRUCTION

- UV-stable, impact-resistant thermoplastic housing; meets UL94V-0 flame rating
- Features quick and easy installation via snap in design
- EXIT letters are 6" tall with 3/4" stroke; 100 ft viewing distance
- Replaceable chevron directional indicator knockouts

### LAMP

- AllnGaP LEDs with a rated life of 10+ years

### ELECTRONICS

- Dual-voltage input capability: 120/277V
- Low-voltage disconnect
- AC indicator light with test switch
- Brownout protection

### BATTERY

- Nickel-cadmium battery comes standard
- Provides a minimum of 90 minutes of illumination upon loss of power

### COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards

### WARRANTY


- 5-year warranty on housing and electronics. Battery is prorated

## LG-150

14 WATT REMOTE CAPABLE EXIT



## DIMENSIONS

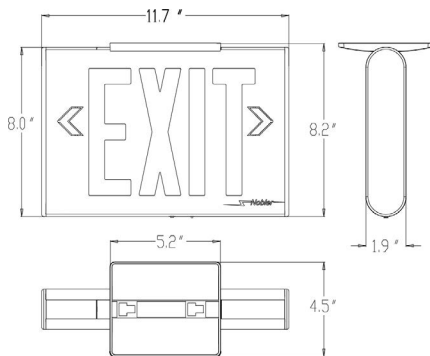

Material	Battery	Code Compliance	Dimensions
Thermoplastic	Nickel-cadmium	UL 924	12.6" W x 8.2" H x 4.5" D

## ORDERING GUIDE

MODEL	LETTER COLOR	HOUSING COLOR	OPTIONS
LG-150	<b>G</b> Green <b>R</b> Red	<b>B</b> Black <b>W</b> White <b>Ti</b> Titanium	<b>PK<sup>1</sup></b> Pendant Kit <b>220</b> 220 VAC Input <b>3HR</b> 3-hour Runtime; No Remote Capability

### Notes:

1. Ordered separately; see spec sheet for pendant kit (PK) for more information