



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

SPECIFICATIONS

FEATURES

- Thermoplastic emergency light with polycarbonate shield
- Designed for locations where rugged protection is required
- Designed for wall mounting
- Remote capable: choice of 30W or 50W unit capacity

CONSTRUCTION

- Injection molded thick polycarbonate shield encases the TP-400 emergency light
- Two fully adjustable heads
- Mounts using a 0.1" thick stainless steel back plate
- VRS option includes tamperproof mounting screws
- 4x option includes Neoprene gaskets suitable for hose down applications

LAMP

- Utilizes two high-efficiency 1W LED heads in emergency mode; higher wattage lamps are available upon request, consult factory for more options

ELECTRONICS

- Dual-voltage input capability: 120/277V
- Low-voltage disconnect
- AC lockout installation
- Brownout protection
- AC indicator LED light standard

BATTERY

- Nickel-cadmium battery comes standard
- Operating temperature range: 10-40° C
- Provides a minimum of 90 minutes of illumination in emergency mode

COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards

WARRANTY



- 5-year warranty on housing and electronics. Battery is prorated

TP-400-VRS/4X-LED

VANDAL RESISTANT/WATERPROOF EMERGENCY UNIT



DIMENSIONS

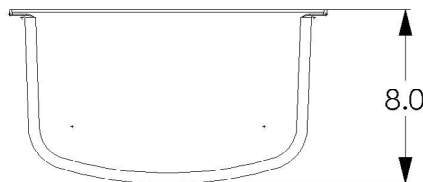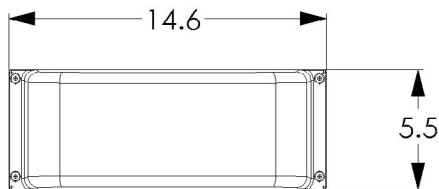

ORDERING GUIDE

MODEL	TYPE	TOTAL DC WATTAGE	LAMP WATTAGE	VOLTAGE	COLOR	OPTIONS ¹
TP-400-LED	VRS	30	2x1	6	W	220 220 VAC Input SD Self Diagnostics TD Time Delay TPS Tamperproof Screws TPSD Tamperproof Screwdriver
	4x	50	2x3	12 ²	B	

Notes:

1. Consult factory for full list of options
2. Available in 60W and select configurations