



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

SPECIFICATIONS

FEATURES

- Extruded aluminum emergency light
- Designed for wall mounting
- Designed to provide glare free illumination
- Features two fully adjustable heads

CONSTRUCTION

- Extruded aluminum body with UV-stable thermoplastic lamp heads
- Optional pendant and ceiling mount kits available

LAMP

- Utilizes two high-efficiency 1W LED heads in emergency mode; higher wattage lamps are available upon request, consult factory for more options

ELECTRONICS

- Dual-voltage input capability: 120/277V
- Low-voltage disconnect
- AC lockout installation
- Brownout protection
- AC indicator light with test switch

BATTERY

- Lead-calcium battery is standard and provides a minimum of 90 minutes of illumination in emergency mode; Nickel-cadmium battery offered as an option
- Operating temperature range: 10 °C to 40 °C

COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards

WARRANTY


- 5-year warranty on housing and electronics. Battery is prorated

LG-800-LED

EXTRUDED ALUMINUM TWO HEAD UNIT



DIMENSIONS

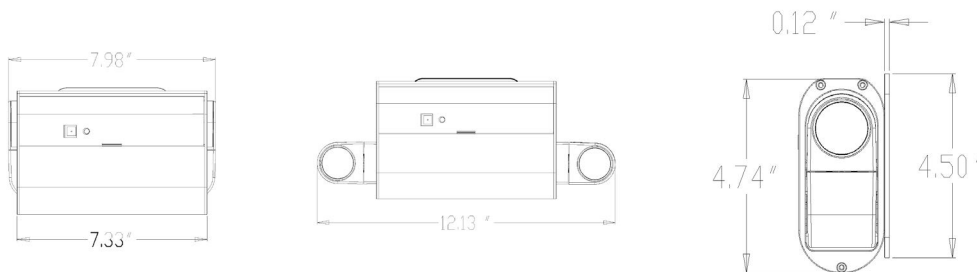

Material	Mounting	Battery	Code Compliance	Dimensions
Extruded Aluminum	Wall	Nickel-cadmium	UL 924	12.13" W X 4.75" H X ?" D

ORDERING GUIDE

MODEL	HOUSING FINISH	OPTIONS
LG-800-LED Extruded Aluminum Two Head Unit	BA Brushed Aluminum WHT Powder Coated White BLK Powder Coated Black DB Dark Bronze Finish BR Brass	220 220 VAC Input PK Pendant Kit CC Ceiling Canopy Kit