TYPE _____

CATALOG# _____

TP-U2
Thermo Plastic LED Exit

Universal Mount

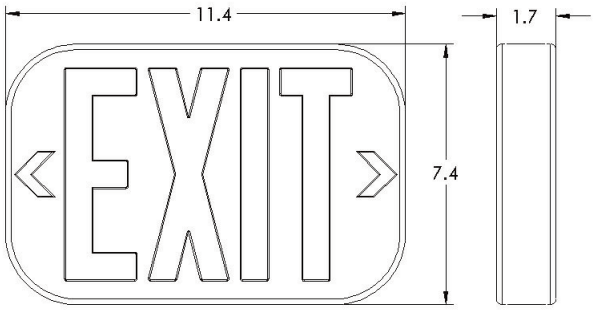

COMMERCIAL SERIES

GENERAL DESCRIPTION
No frills commercial thermoplastic LED exit sign is the smallest low-profile compact design to date, packaging the highest level of quality and even illumination with the easiest and quickest installation available in the market today.

HOUSING & FACE DESIGN
The housing is UV stable injection-molded thermoplastic listed to UL 95-VA standard. Stencils are made of the same material with field selectable universal snap in and out chevrons.

ILLUMINATION
Long lasting high output ALInGaP LEDs with minimum degradation over life of LEDs. Unit draws less than 3 watts and meets all Energy Star Requirements. Available in red or green.

ELECTRONICS
Dual input Transformer (120/277 60Hz) is Standard . Unit is damp location listed 50°-104°F (10°-40°C). EM option features solid state design with low voltage disconnect, brown out protection, and AC indicator LED with test switch. Battery is standard Nickel Cadmium.

CODE COMPLIANCE
ETL Listed to UL 924 for damp location, meets or exceeds NFPA, NEC, and OSHA illumination standard.

WARRANTY
5 years on housing and electronics with a 7 year pro rated warranty on the battery.

TP	—	U2	—		—		—	
Model		Mounting		Letter Color		Housing Color		Unit Power Configuration

U	Universal	R	Red	*W	White	AC	AC Only
		G	Green	B	Black	EM	Emergency
				*Standard			

20 Pocono Rd. Brookfield, CT. 06804 Tel: 203-775-0172 ~ Fax: 203-775-0797