



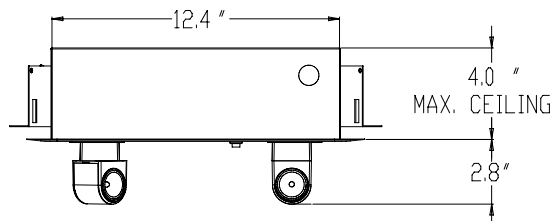

Recessed Wall or Ceiling Mount

DIMENSIONS

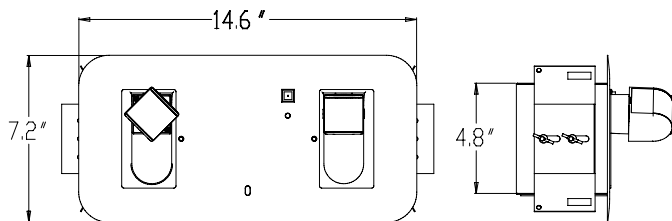

SHOWN WITH LAMP HEADS OPENED



Optional Caddy-Bar
Order #
CAD-24"

TYPE _____

CATALOG# _____

LG-300

NOBLER SERIES
Recessed MR11 Unit

NOBLER SERIES™

GENERAL DESCRIPTION

Redefining the aesthetic standards the industry has settled for in the past, the LG-300 Nobler™ series offers a high-performance and fully adjustable Life Safety product with unique, gently contoured thermo plastic housing. Utilizing 2 MR-11 lamp heads, TP-300 provides the highest level of glare-free illumination while blending nicely into any environment. Unit features remote capability to power an additional 14 Watts of remote heads.

HOUSING

UV Stable Thermo Plastic flame retardant lower Lamp housing, and Aluminum trim plate meets UL standard 95-VA. Rugged, heavy gauge, galvanized steel back box. Easily installs in drywall or suspended ceilings. Suitable for use in air-handling plenums. Standard White, Black and Titanium finish (matches all products in same family.) Features 2 fully-adjustable (360° rotation and 90° angle) MR-11 Halogen lamps with a maximum of 7 watts per.

ILLUMINATION

Two 7 Watt Standard MR-11 Halogen lamps mounted in precision formed fully adjustable assemblies exceed illumination required by UL 924 with better space to mounting criteria than the industry standard 5.4 Watt incandescent offering.

ELECTRONICS & BATTERY

Standard transformer input is dual voltage 120/277 60Hz. The charging system features (LVD) Low Voltage Disconnect, AC lockout installation and brown out protection and AC indicator LED light standard. The maintenance free Sealed Lead Calcium battery provides a minimum of 90 minutes of illumination in emergency mode with an average life of 5 years. Optional Nickel Cadmium battery also available.

CODE COMPLIANCE


Meets or exceeds UL 924, NFPA NEC and OSHA illumination standards.

WARRANTY

LIFETIME Limited warranty on housing and electronics
5 year pro rated warranty on Sealed Led Acid battery.
7 year pro rated warranty on Nicad battery

TP-300

Model




Total Unit DC Wattage
W/ Integral Lamps

14 14 W intergral Lamps (2x7)
28 14 W intergral Lamps (2x7) with 14W remote capable



Housing Color

W White
B Black
Ti Titanium



Factory Installed Options

NC Nicad Battery
220 220 VAC Input
SD Self Diagnostics
Cad-24 Caddy Bar
**TD Time Delay

**Must Specify Input Voltage And Delay Time



NS 007A